


Stahlfilterrohre mit gestanzten Öffnungsfenstern

A x B (mm)	X - Y (mm)
3 X 40	60 - 15
4 X 40	60 - 15
5 X 40	60 - 15
6 X 40	60 - 20
8 X 40	60 - 20
10 X 40	60 - 20

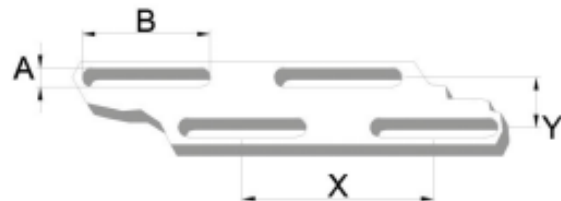

Durchmesser (mm)

114,3– 139,7
168,3 – 177,8
193,7 – 219,1
244,5 – 273,0
323,9 – 355,6
406,4 – 457,0
508,0 – 609,6
711,2 -812,8
914,4 – 1016
1219,

2

Wandstärke (mm)

S - Th (mm)	3 X 40	4 X 40	5 X 40	6 X 40	8 X 40	10 X 40
3,0	O	O	O	O	O	O
4,0	*	O	O	O	O	O
5,0		O	O	O	O	O
6,0		*	O	O	O	O
8,0				*	O	O
10,0					*	*

* solo acciaio carbonio - Black steel only

OPEN AREA

Asola - Ob. hole	3 X 40	4 X 40	5 X 40	6 X 40	8 X 40	10 X 40
%	13,33	17,78	22,22	20	26,67	33,33